

# How to Update your Kestrel 5000 Series Firmware using iOS



- ▣ Requirements
  - [Kestrel LiNK for iOS Program](#)
  - Kestrel 5000 Series LiNK Compatible Unit
  - iOS Device\*




*(Note: This update can take up to 30 minutes,  
Please keep the Kestrel and iOS device in range of each  
other during entire procedure)*

\*Device Compatibility: Firmware: iOS versions 6 and higher.  
Hardware: iPhone 4s, iPad 3rd Generation, iPod Touch  
5th Generation and above.

1) Log into the iTunes store on your iOS device and search for “Kestrel LiNK”. If you already have Kestrel LiNK installed, please update the application to the latest version available.

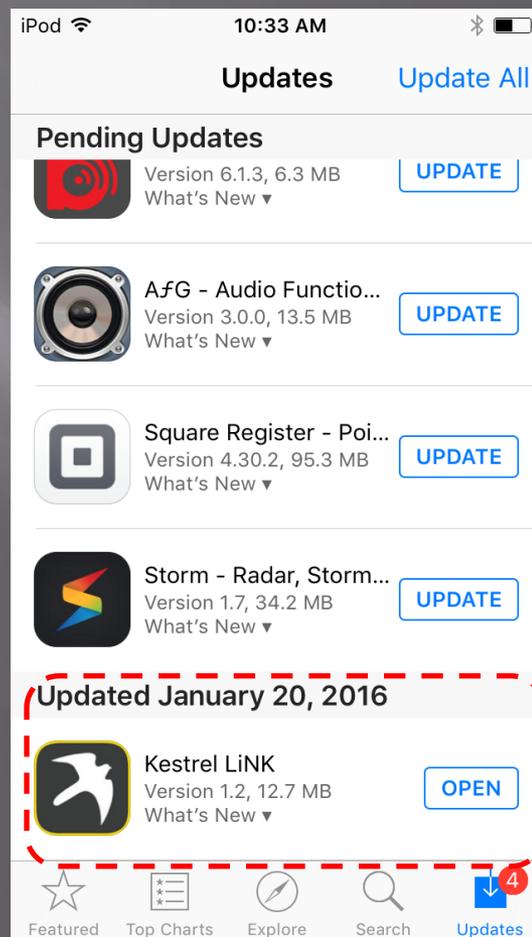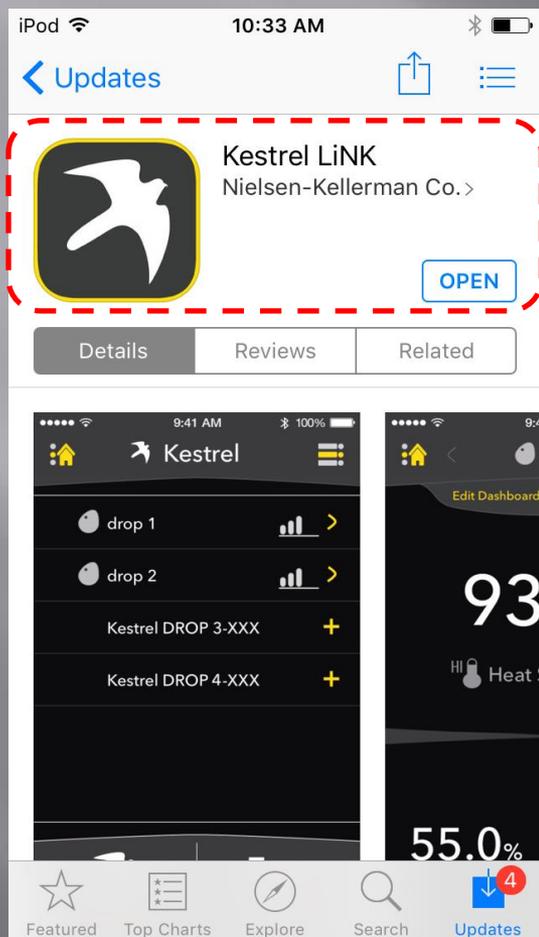


2) On the Kestrel, go to the Main Menu and then Bluetooth. Make sure Bluetooth is set to ON and Conct is PC/MOBILE.

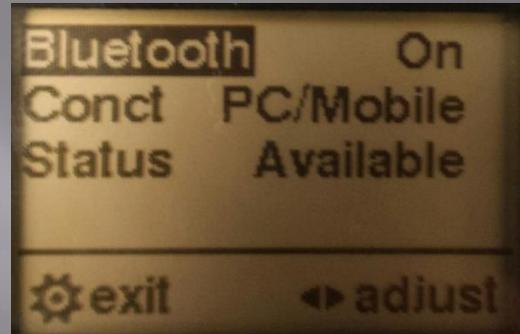



**Please note:** If Status is showing as Connected, the Kestrel may already be connected to a different device. You will need to close this connection before connecting with this new device.

3) Next please make sure the Bluetooth is turned ON on your iOS device and then open the LiNK for iOS program.

4) Go to the Connect Screen and select your Kestrel.


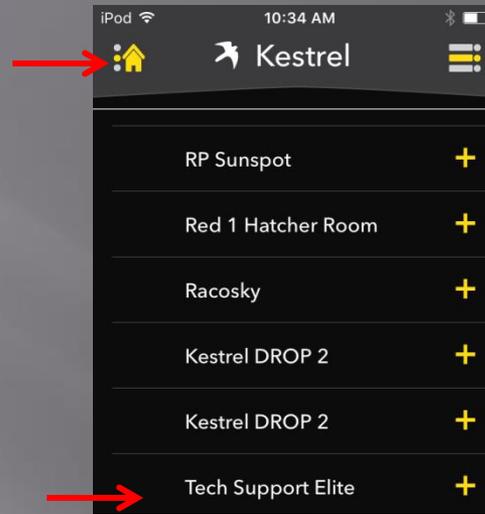


5) You will immediately be prompted if a firmware update is available. Click continue (If you are not prompted, you have the latest firmware already).

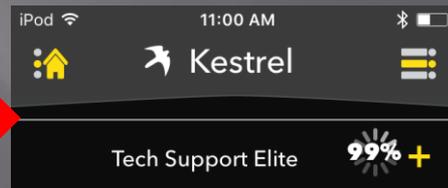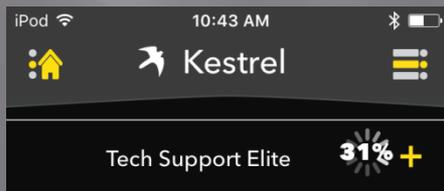

6) Please wait for the Kestrel to reset on its own to ensure the update is completed.

7) To check if the update was completed, you can go to the Main Menu->About->Version and check to see if the FW has ben updated.v

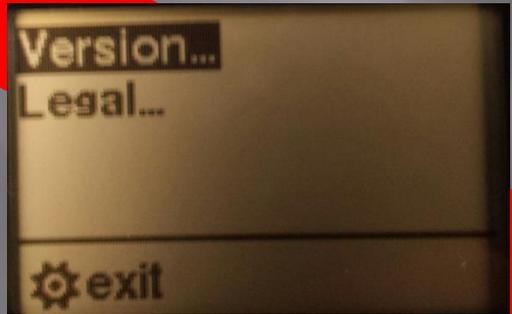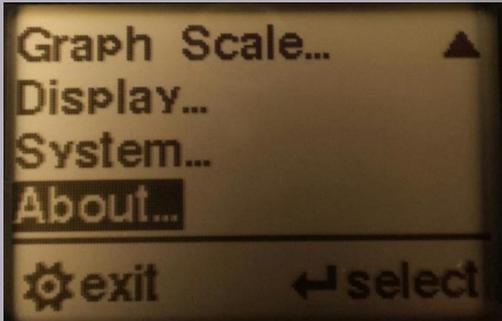

A screenshot of the system information screen. It displays the following data:

Model	5700AL
SN	2103700
FW	1.03
BOOT	0.07

At the bottom, there is a gear icon followed by 'exit'. A red box highlights the 'FW' row.

If you have any issues,  
please email [techsupport@nkhhome.com](mailto:techsupport@nkhhome.com)